

# Outdoor Cultivation of Microalgal Polycultures on Landfill Leachate



Marie D. Peralta<sup>1</sup> and Ann C. Wilkie<sup>2</sup>

<sup>1</sup> Biology Major, College of Agricultural and Life Sciences <sup>2</sup> Faculty Mentor, Soil and Water Sciences Department, University of Florida-IFAS, Gainesville, Florida

# RITHOTOGY LABORATORY

#### Abstract

Landfill leachate (LL) has sufficient nutrients for microalgae cultivation, making it a viable growth medium for algal biomass production. Total ammonia nitrogen (TAN) is typically very high in LL, which hinders algal growth, prompting cultivation in diluted LL or determining other favorable conditions for growth. The research objective was to grow indigenous microalgae on raw LL in a 100-L outdoor raceway pond. Mature leachate was collected from a closed landfill and characterized for pH, conductivity, alkalinity, solids concentrations and chemical oxygen demand. The leachate was inoculated with a microalgal polyculture and monitored daily for pH, growth (optical density) and TAN. Carbon dioxide was automatically added as needed for pH control, through a diffuser. Microscopy was used to evaluate the biodiversity of the microalgal polyculture before and after the experimental trial. Results showed that algal biomass increased in 100% LL over the 11-day period. CO<sub>2</sub> was an effective means of maintaining a neutral pH, which favored the presence of ionized ammonia (NH<sub>4</sub>+) rather than unionized, free ammonia (NH<sub>3</sub>) that can disrupt algal cellular metabolism. Certain algae strains were more tolerant than others. The overall reduction of TAN from 825 to 4 ppm demonstrates the potential of microalgae for bioremediation of LL.

#### Introduction

Microalgae can produce carbohydrates, lipids, and proteins. These products can be used as possible sources of biofuel <sup>1</sup>:


- Biodiesel from algae lipids
- Bioethanol from algae press cake remaining after lipid extraction
- Biogas from anaerobically digesting algae biomass



Leachate collected from Alachua County Southwest Landfill (ACSWL), Archer, FL

## Using microalgae as a renewable source of fuel provides many advantages:

- High biomass production
- Cultivation on non-arable land
- Elimination of food versus fuel debate

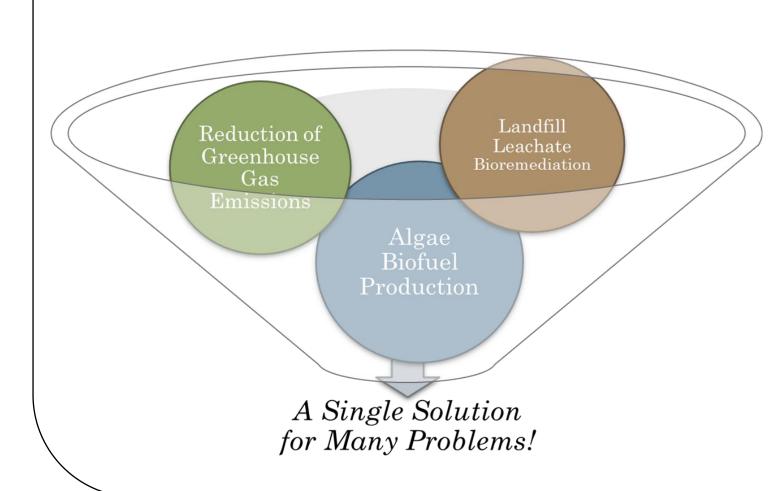

### Landfill leachate (LL) is liquid that permeates through landfills

- Must be managed to prevent contamination to the environment<sup>2</sup>
- Widely available
- LL from different landfills demonstrate different properties
- Nutrients present in LL allows for algae growth <sup>3</sup>

#### **Objectives**

Evaluate the growth and remediation potential of microalgae in 100% landfill leachate using outdoor 100-L open raceway ponds

#### Methods

- Inoculate 100-L open raceway pond with indigenous algae – 20% ( v/v)
- Use light microscopy to evaluate biodiversity of microalgal cultures
- On-demand diffusion of carbon dioxide (CO<sub>2</sub>) into pond at a pressure of 10 psi to maintain culture at pH=7
- Leachate characterization including pH, conductivity, alkalinity, chemical oxygen demand (COD), solids concentrations, total ammonia nitrogen (TAN), and optical density (OD)
- Daily monitoring of pond including pH,
  OD (spectroscopy at 750 nm) and TAN
- Conduct analyses in triplicate and in accordance with Standard Methods<sup>4</sup>



100-L Raceway Pond




Inoculating pond with indigenous algae

#### Results

Table 1. Physico-chemical Composition of ACSWL Leachate

	-
Component	Average $\pm$ std. dev. $(n = 3)$
рН	7.95 ± 0.05
Alkalinity (mg CaCO <sub>3</sub> /L)	5453 ± 46
Total COD (mg/L)	1763 ± 137
Conductivity (mS/cm)	12.7 ± 0.0
Total solids (% wet weight)	0.66 ± 0.01
Volatile solids (% total solids)	12.8 ± 1.3
TAN (mg/L)	887 ± 10
Optical density (Absorbance)	0.014 ± 0.002



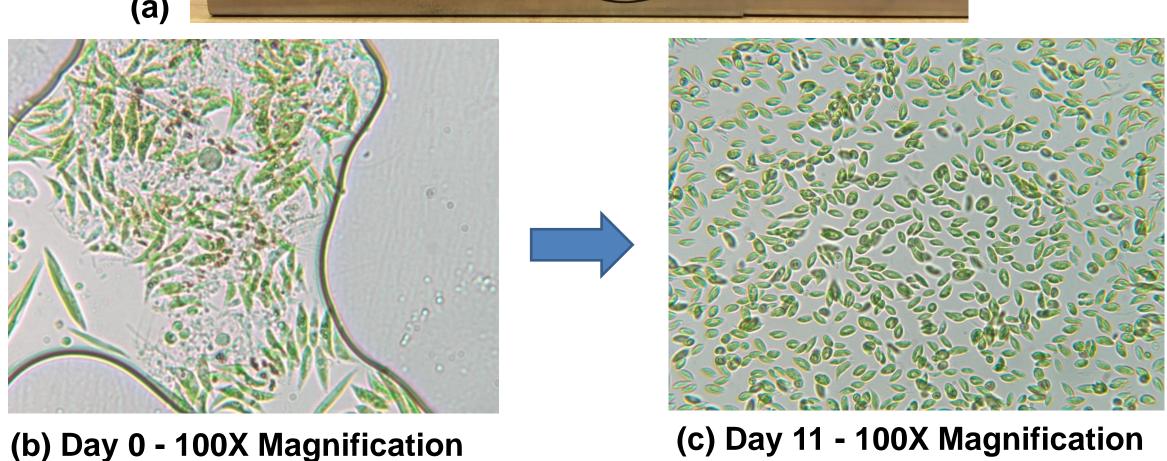

Schroederia and Chlorogonium

Figure 1. Pond samples in daily progression (a) and microscopic images showing transition of microalgae from a polyculture on Day 0 (b) to a biculture on Day 11 (c)

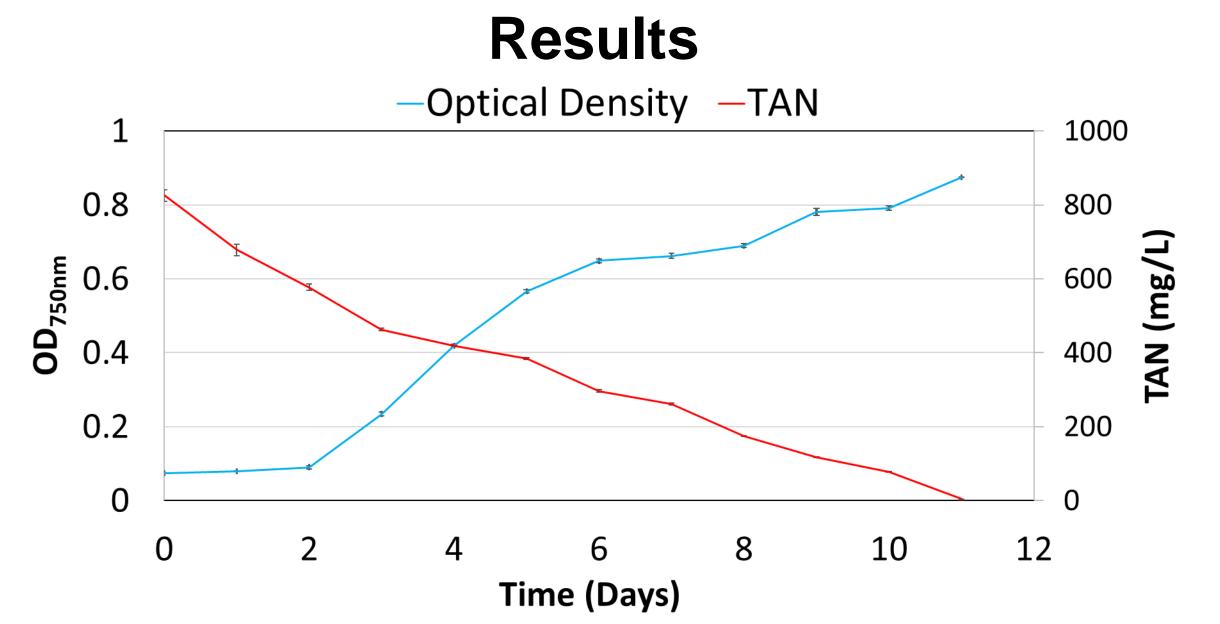


Figure 2. Optical Density and TAN Concentrations of Pond (Error bars represent standard deviation, n = 3)

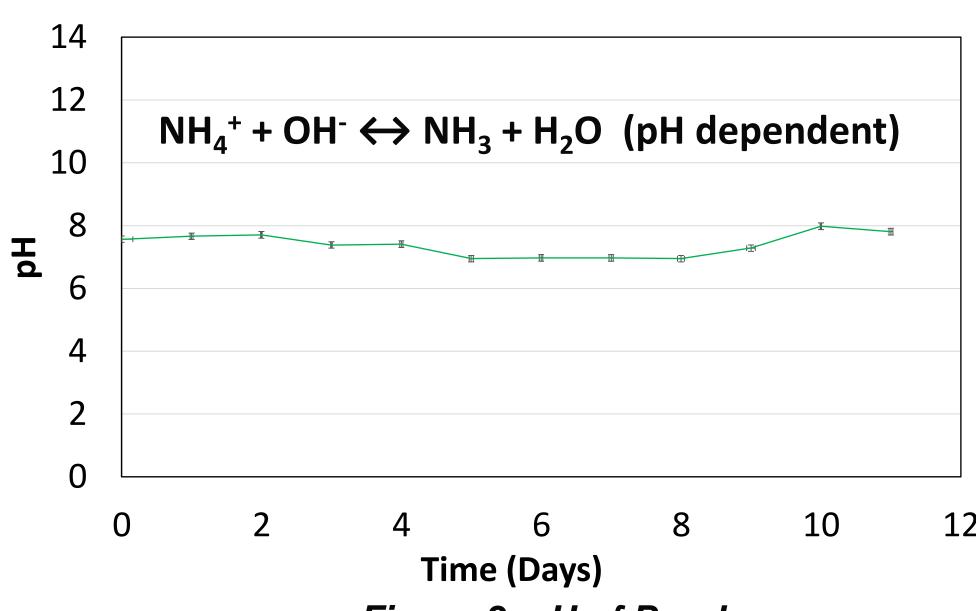


Figure 3. pH of Pond (Error bars represent standard deviation, n = 3)

The ammonia concentrations in the LL did not inhibit algal growth as  $CO_2$  was an effective means of controlling pH. TAN can be partitioned into an ionized form (NH<sub>4</sub>+) or an unionized gaseous form (NH<sub>3</sub>) known as free ammonia depending on pH and temperature. At high pH, the equation shifts toward free ammonia, which is more toxic and can disrupt algal cellular metabolism. In this study, a neutral pH was maintained and TAN concentrations (primarily in the form of ammonium) decreased from 825 to 4 ppm as the nutrients were effectively utilized by the algal biomass.

#### Conclusions

- Algal growth was evident in 100% landfill leachate
- The microalgal polyculture evolved into a predominant biculture of *Schroederia* sp. and *Chlorogonium capillatum*, suggesting that these algae are more tolerant of high-ammonia wastewaters
- CO<sub>2</sub> was effective at maintaining a neutral pH, which promoted nutrient uptake by the algae and prevented inhibition from free ammonia

#### References

- 1. Batten, D., Beer, T., Freischmidt, G., Grant, T., Liffman, K., Paterson, D., Priestly, T., Rye, L. and Threlfall, G. (2013). Using wastewater and high-rate algal ponds for nutrient removal and the production of bioenergy and biofuels. *Water Science and Technology, 67(4)*, 915–924. doi: 10.2166/wst.2012.618
- 2. Mor, S., Ravindra, K., Dahiya, R.P., and Chandra, A. (2006). Leachate characterization and assessment of groundwater pollution near municipal solid waste landfill site. *Environmental Monitoring and Assessment*, **118**(1), 435–456. doi: 10.1007/s10661-006-1505-7
- 3. Edmundson, S.J. and Wilkie, A.C. (2013). Landfill leachate a water and nutrient resource for algae-based biofuels. *Environmental Technology,* **34**(13–14):1849-1857. doi: 10.1080/09593330.2013.826256
- 4. APHA. (2012). Standard Methods for the Examination of Water and Wastewater. 22<sup>nd</sup> ed. Washington DC: American Public Health Association/American Water Works Association/Water Environment Federation.

#### Acknowledgements

This research was conducted for SWS 4911 – Supervised Research in Soil and Water Sciences. Funding support was provided by the Alachua County Solid Waste and Resource Recovery Department, Gainesville, Florida.